



Chemical Dosing And Control System For Engine Cooling Waters

There is an increasing focus in the marine industry to improve crew safety and working conditions. This is driven by rules and regulations such as MLC 2006. On board ship, the majority of our water treatment chemicals are handled manually, which poses a risk to the crew. Solutions to reduce or eliminate chemical handling will provide improvements to crew safety and give the additional benefit of improving the surety of chemical application and the protection of your valuable equipment.

Nalfleet™ Aquaguard CW is designed for the application and control of closed system corrosion inhibitors used to protect engine cooling systems. The conductivity of the engine cooling water is directly proportional to the level of corrosion inhibitor.

The Aquaguard CW system will continuously monitor the conductivity of the engine cooling water and automatically apply inhibitor to control at the advised set point.

The corrosion inhibitor is housed in a protective bund and dosed direct from the drum. This reduces the need for chemical handling and provides an improvement to health and safety and saves on manpower.


Features

- Continuous monitoring and application of corrosion inhibitor
- Dosage is delivered direct from the drum
- Low level alarms
- Bunded drum enclosures
- Rugged stainless steel construction

Benefits


- Surety of application and optimised system protection
- Reduced chemical handling and improved health and safety
- Simple indication of drum replacement
- Spill capture
- Suitable for the marine environment

Automatic vs manual chemical application

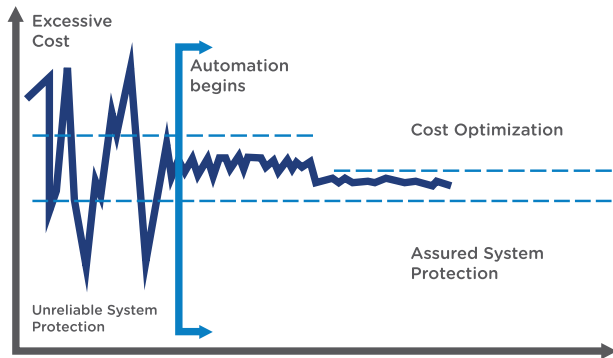

Automation improves control and system protection whilst optimising chemical usage.

Typical installation layout

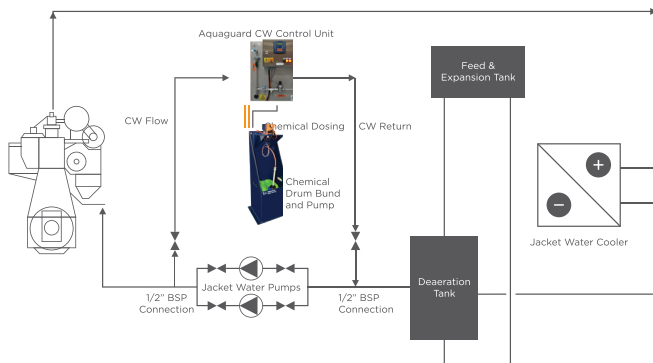

In order to circulate a representative sample of the engine cooling water across the conductivity sensor it is necessary to simply connect the 1/2" BSP, inlet and outlet connections to flow and return pipes around the jacket water system. Please refer to the Aquaguard CW manual for more detailed drawings and installation instructions.

Product details

Product	Unit of Supply	Product Number
Aquaguard CW	1	778907
<ul style="list-style-type: none"> Dosing control system on back panel with anti-vibration mounts Pre wired to plug in to BETA dosing pump 		
BETA dosing pump – 0 - 2.1 Lit / Hr, 16 Bar	1	773184
Drum bund – Hold 25 Lit Drum	1	778909
Chemical Suction & Level Switch Assembly – 6 x 4mm	1	619692
Spectrapak 309 Test Kit – Nitrite, Chloride, pH	1	739466

Wilhelmsen Ships Service
 Phone: (+47) 67 58 40 00
 Fax: (+47) 67 58 40 80

Postal Address:
 PO Box 33, NO-1324
 Lysaker, Norway

wilhelmsen.com

Contact your local WSS customer services for prices and worldwide availability.